

## Intercomp CS™ 3000



### Standard Features

- Digital calibration
- Auto shut-off
- NEMA 4 cast aluminum case
- 1" LCD digital readout
- Display automatically adjusts to lighting conditions
- Recessed push-button switch
- Powered by eight D cell batteries
- Infrared remote control

### Specifications

#### RESOLUTION:

20 bit A/D delivers more than 1 million internal counts

#### GENERAL:

Zero, lb/kg, Tare Set/Display, Tare Clear, On, Off

#### DISPLAY:

1" (25 mm) 5-digit liquid crystal (LCD)

#### INDICATORS:

lb/kg and Net

#### POWER:

(Batteries are not included) eight D size disposable alkaline dry cell or rechargeable nickel-cadmium cell. Battery life up to 400 hours continuous use.

#### TARE:

Up to 100% of capacity

#### ENCLOSURE:

NEMA 4 cast aluminum case

#### HOOK OR EYE:

Crosby-Laughlin or equivalent

#### APPROVALS:

NTEP Certified per H-44, Class III, 3000d; Class III, 5000d, CC# 97-135A4 CE

#### AUTO SHUT-OFF:

Low battery, or after five minutes without use

#### ACCURACY:

±0.1% of reading

#### TEMPERATURE:

Operating -4°F to 140°F (-20°C to 60°C)

#### NOMINAL OVERLOAD:


200% of capacity

#### MAXIMUM OVERLOAD:

500% of capacity

#### WARRANTY:

One-year limited warranty

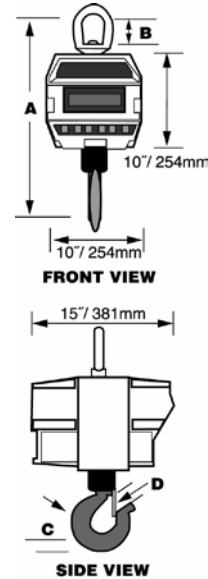

PART#	CAPACITY	GRADUATION	A	B	C	D	*	HOOK	EYE NUT OR SHACKLE
82449	500 lb	0.2 lb	19.3 in	3.06 in	1.44 in	1.41 in	*	C/L 3 ton	C/L #7
	(250 kg)	(0.1 kg)	(490 mm)	(77.7 mm)	(35.1 mm)	(35.8 mm)	*	S1 Swivel	Eye Nut
82450	2000 lb	1.0 lb	19.3 in	3.06 in	1.44 in	1.41 in	*	C/L 3 ton	C/L #7
	(1000 kg)	(0.5 kg)	(490 mm)	(77.7 mm)	(35.1 mm)	(35.8 mm)	*	S1 Swivel	Eye Nut
43652	5000 lb	1.0 lb	22 in	3.06 in	1.82 in	1.69 in	*	C/L 5 ton	C/L #7
	(2500 kg)	(0.5 kg)	(558 mm)	(77.7 mm)	(44.5 mm)	(42.9 mm)	*	S1 Swivel	Eye Nut
43653	10000 lb	2 lb	22 in	3.06 in	1.82 in	1.69 in	*	C/L 5 ton	C/L #7
	(5000 kg)	(1 kg)	(558 mm)	(77.7 mm)	(44.5 mm)	(42.9 mm)	*	S1 Swivel	Eye Nut
43654	20000 lb	5 lb	37.15 in	6.25 in	2.6 in	2.41 in	*	C/L 10 ton	C/L #11
	(10000 kg)	(2 kg)	(944 mm)	(159 mm)	(65.8 mm)	(61.2 mm)	*	S1 Swivel	Eye Nut
43655	30000 lb	10 lb	39.15 in	6.25 in	3 in	3.19 in	*	C/L 15 ton	C/L #11
	(15000 kg)	(5 kg)	(994 mm)	(159 mm)	(76.2 mm)	(81.3 mm)	*	S1 Swivel	Eye Nut
43656	50000 lb	10 lb	43.5 in	6 in	3.6 in	3.62 in	17 in	C/L 25 ton	C/L 30 ton
	(25000 kg)	(5 kg)	(1105 mm)	(152 mm)	(93 mm)	(92 mm)	(432 mm)	S1 Swivel	#2140
43657	70000 lb	20 lb	47.56 in	6 in	4.56 in	3.75 in	17 in	C/L 35 ton	C/L 40 ton
	(35000 kg)	(10 kg)	(1208 mm)	(152 mm)	(116 mm)	(92.3 mm)	(432 mm)	S1 Swivel	#2140
43658	100000 lb	20 lb	53 in	7.75 in	5.06 in	4.25 in	18 in	C/L 45 ton	C/L 55 ton
	(50000 kg)	(10 kg)	(1347 mm)	(197 mm)	(129 mm)	(108 mm)	(457 mm)	S1 Swivel	#2140

\* Dimensions are top to bottom shackle eye to eye on 25-50 ton/12.5-25 metric ton capacity models

† Unit comes standard with top shackle & bottom swivel hook. Capacities to 300 tons available upon request.