

## Intercomp CS™ 5000



### Approvals



### Standard Features

- Wireless remote telemetry
- Communication distance 450 feet
- Optional multiple wireless crane scale units to one indicator unit
- Crosby S-1 bearing swivel hook

### Specifications

#### DISPLAY:

0.8 in/20 mm high – 5 1/2 digit light emitting diode (LED)

#### RESOLUTION:

20 bit A/D delivers more than 1 million internal counts

#### AUTO SHUT-OFF:

Low battery, or after five minutes without use

#### TARE:

Up to 100% of capacity

#### OUTPUT:

RS-232/20mA

#### INDICATOR UNIT:

14 Volt AC or DC, 110/220 VAC with power pack (included)

#### CRANE UNIT:

Eight D size disposable alkaline dry cell or rechargeable nicad cell (NOT INCLUDED)

#### APPROVALS:

NTEP Certified Class III 3000d, Class III L 5000d, COC 97-135A4, CE

#### ACCURACY:

+/-0.1% of reading

#### TEMPERATURE:

Operating -4° F to 140° F (-20° C to 60° C)

#### NOMINAL OVERLOAD:


200% of capacity

#### MAXIMUM OVERLOAD:

500% of capacity

#### WARRANTY:

One-year limited warranty

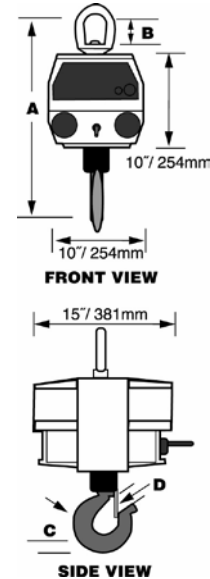

PART#	CAPACITY	GRADUATION	A	B	C	D	*	HOOK	EYE NUT OR SHACKLE
82480	500 lb (250 kg)	0.2 lb (0.1 kg)	19.3 in (490 mm)	3.06 in (77.7 mm)	1.44 in (35.1 mm)	1.41 in (35.8 mm)	*	C/L 3 ton	C/L #7
							*	S1 Swivel	Eye Nut
82481	2,000 lb (1,000 kg)	1.0 lb (0.5 kg)	19.3 in (490 mm)	3.06 in (77.7 mm)	1.44 in (35.1 mm)	1.41 in (35.8 mm)	*	C/L 3 ton	C/L #7
							*	S1 Swivel	Eye Nut
82482	5,000 lb (2,500 kg)	1.0 lb (0.5 kg)	22 in (558 mm)	3.06 in (77.7 mm)	1.82 in (44.5 mm)	1.69 in (42.9 mm)	*	C/L 5 ton	C/L #7
							*	S1 Swivel	Eye Nut
82483	10,000 lb (5,000 kg)	2 lb (1 kg)	22 in (558 mm)	3.06 in (77.7 mm)	1.82 in (44.5 mm)	1.69 in (42.9 mm)	*	C/L 5 ton	C/L #7
							*	S1 Swivel	Eye Nut
82484	20,000 lb (10,000 kg)	5 lb (2 kg)	37.15 in (944 mm)	6.25 in (159 mm)	2.6 in (65.8 mm)	2.41 in (61.2 mm)	*	C/L 10 ton	C/L #11
							*	S1 Swivel	Eye Nut
82485	30,000 lb (15,000 kg)	10 lb (5 kg)	39.15 in (994 mm)	6.25 in (159 mm)	3 in (76.2 mm)	3.19 in (81.3 mm)	*	C/L 15 ton	C/L #11
							*	S1 Swivel	Eye Nut
82486	50,000 lb (25,000 kg)	10 lb (5 kg)	43.5 in (1105 mm)	6 in (152 mm)	3.6 in (93 mm)	3.62 in (92 mm)	17 in (432 mm)	C/L 25 ton	C/L 30 ton
								S1 Swivel	#2140
82487	75,000 lb (35,000 kg)	20 lb (10 kg)	47.56 in (1208 mm)	6 in (152 mm)	4.56 in (116 mm)	3.75 in (92.3 mm)	17 in (432 mm)	C/L 35 ton	C/L 40 ton
								S1 Swivel	#2140
82488	100,000 lb (50,000 kg)	20 lb (10 kg)	53 in (1347 mm)	7.75 in (197 mm)	5.06 in (129 mm)	4.25 in (108 mm)	18 in (457 mm)	C/L 45 ton	C/L 55 ton
								S1 Swivel	#2140

\* Dimensions are top to bottom shackle eye to eye on 25-50 ton/12.5-25 metric ton capacity models

† Unit comes standard with top shackle & bottom swivel hook. Capacities to 300 tons available upon request.