

Vehicle/Track Scales

SURVIVOR® ATV

Fully Electronic Portable Flattop Truck Scale - Steel Deck

Product Bundles
Now Available!



INTEGRATES WITH




Approvals



Standard Features

- Three standard widths: 10', 11', and 12' (available up to 14', NTEP Certified)
- 75,000 lb load cells and pre-assembled G-Force™ mounts
- Up to 270,000 lb full scale capacity
- Top access for electronics
- NTEP Certified, CC #02-003A1
- 90,000 lb Concentrated Load Capacity (CLC)
- 90,000 lb Dual Tandem Axle (DTA)
- Bolt-on backfill ramp bulkheads (removable for concrete approaches)
- End clean out
- Span deflection ratio (1:1100) for legal highway loads

HEAVY
DUTY

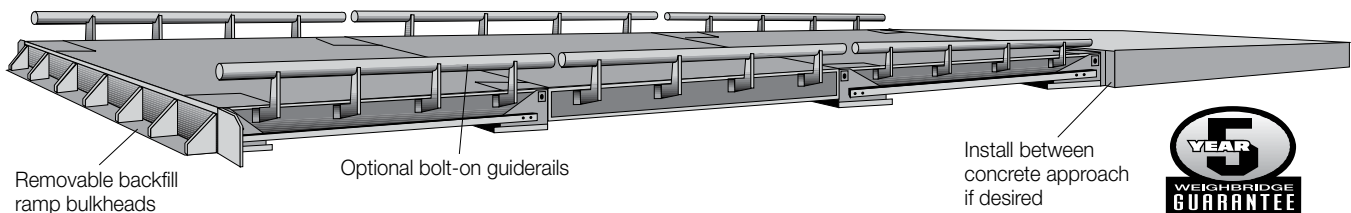

Removable backfill ramp bulkheads

Optional bolt-on guiderails

Install between concrete approach if desired



Package includes: Bolt-on backfill ramp bulkheads (removable for concrete approaches); assembled weighbridge modules and weighbridge fasteners; load cells with conduit fitting; load cell mounts; copper transient bypass cables at each load cell; metal conduit on weighbridge for load cell cable runs; flexible plastic conduit from load cell to metal conduit; conduit fittings from plastic to metal conduit; FRP junction box(es); homerun cable to indicator (60' long) and print packages including installation manual.

Package does not include: Indicator; printer; freight charges including material handling; shipping charges, transportation permits and fees, escort(s) charge, and insurance transportation fees.

Specifications

LOAD CELLS AND MOUNT ASSEMBLIES:

75,000 lb capacity; G-Force™ Patented Self-Checking Mounting System, top access to load cells

FULL SCALE CAPACITY:

Up to 270,000 lb

DEFLECTION FACTOR:

1:1100

CONCENTRATED LOAD CAPACITY (CLC):

90,000 lb

DUAL TANDEM AXLE (DTA):

90,000 lb

APPROVALS:

NTEP Certified per H-44, Class III, CC #02-003A1

WARRANTY:

Five-year limited warranty on the weighbridge
Five-year parts warranty, including lightning protection (please see Warranty Statement on page VTS-16)
Five-year lightning extended warranty (see page VTS-16)

Due to the variety of configurations, please consult the factory to discuss application requirements and for complete specifications and price quotations.